


**NEW!**

## FLEXIBLE ORBITAL AIR POWERED SANDER

FS 42070 A  
FS 40070 A\*

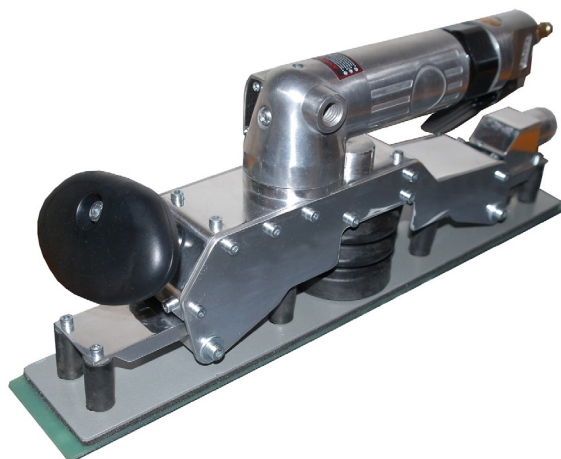

### TECHNICAL PARAMETERS

working air pressure	6.3 Bar
air consumption	400 l/min
free speed	7600 1/min
air inlet	1/4"
grinding stroke	3.2 mm
dimensions of the plate	420 x 70 mm (* 400 x 70 mm)
min. radius of convex surface	670 mm
min. radius of concave surface	700 mm
weight	2.8 Kg
dimensions of abrasive	420 x 70 mm (* 400 x 70 mm), 14 openings, VELCRO
diameter of the suction nozzle	26 mm
certificate	CE

### USAGE

The device is designed for sanding large convex and concave surfaces of the following materials: wood, epoxy, polyester and polyurethane coatings and mastics, plaster and plastic.

### PACKAGING AND DELIVERY

Sander, operating instructions, 2 sheets of sandpaper, plastic case

### MANUFACTURER

INNOVIA, s.r.o.  
Sterboholska 1421/37  
102 00 Prague, Czech Republic

Tel: **+420 725 929 393**  
[info@flexisander.com](mailto:info@flexisander.com)  
[www.flexisander.com](http://www.flexisander.com)

**FLEXISANDER**  
ahead of the curve

The manufacturer reserves the right to make changes to products.  
Current information is available at [www.flexisander.com](http://www.flexisander.com). Made in Czech Republic (EU).