




NEW!
Ergonomic design
Lower weight
Dust exhaust system

FLEXIBLE SANDING BOARDS WITH DUST EXHAUST SYSTEM

FSB 056111DE
FSB 084112DE
FSB 112113DE

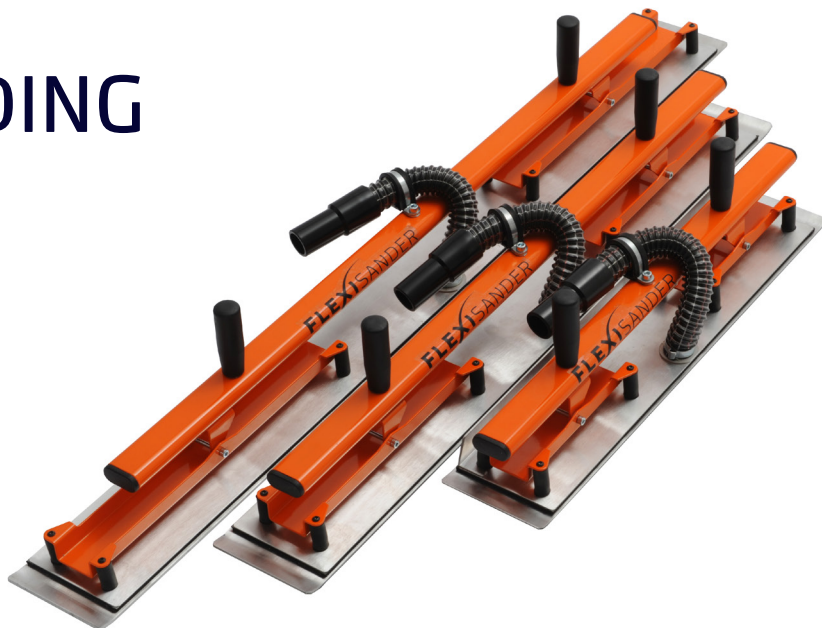

TECHNICAL PARAMETERS

model	FSB 056111DE	FSB 084112DE	FSB 112113DE
dimensions of the plate	560 x 115 mm	840 x 115 mm	1120 x 115 mm
min. convex radius	500 mm	800 mm	1200 mm
min. concave radius	600 mm	900 mm	1300 mm
weight	1.25 Kg	1.9 Kg	2.2 Kg
hardness of the plate	1 (extra soft)	2 (soft)	3 (hard)

USAGE

Sanding flat and curved surfaces. Must be used only with sanding material ABRANET (MIRKA ABRASIVES).

PACKAGING

Carton

MANUFACTURER

INNOVIA, s.r.o.
Sterboholska 1421/37
102 00 Prague, Czech Republic

Tel: **+420 725 929 393**
info@flexisander.com
www.flexisander.com

FLEXISANDER
ahead of the curve

The manufacturer reserves the right to make changes to products.
Current information is available at www.flexisander.com. Made in Czech Republic (EU).

X FSB 056111DE



X FSB 084112DE



X FSB 112113DE





OWNER'S MANUAL



FSB 056111DE
FSB 084112DE
FSB 112113DE

CAUTION!

Before operating the device, carefully read this manual and strictly follow the instructions listed below:

- ◆ The dust that arises from sanding is harmful to your health, therefore, always use an external extraction and respiratory protection mask.
- ◆ Wear sight and hand protection.
- ◆ Never use for sanding any materials containing asbestos.

WORK AREA SAFETY

- ◆ Use abrasive materials recommended by the manufacturer.
- Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- ◆ Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.
- Do not overreach. Keep proper footing and balance at all times. This enables better control of the tool in unexpected situations.
- Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.
- ◆ If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

ABRASIVES MOUNTING

The machine is equipped with a flexible Velcro system insole for easy and quick attachment of the sanding material.

- Before use, check the Velcro on planchette is not mechanically damaged (e.g. melted due to excessive use, etc.).
- Attach dimensionally the same sheet of sanding material so that the holes for dust extraction sanding sheet are flush with the holes on the planchette.
- ◆ Remove the sanding sheets by lightly pulling its edges.

DUST EXHAUST

The machine is equipped with an adapter for connecting an external suction of sanding dust. Suction attachment is 1" (26 mm) in diameter. Dust is extracted from the ground surface through fourteen holes and is fed to an external extraction unit through a hose. This feature ensures the protection of the working environment and the health of a worker during sanding.

- As far as possible, use a dust extraction system suitable for the material.
- Provide for good ventilation of the working place.
- It is recommended to wear a dust respirator. Observe the relevant regulations in your country for the materials to be worked.
- ◆ Prevent dust accumulation at the workplace. Dusts can easily ignite.



OWNER'S MANUAL

RECYCLING

Equipment and its accessories and packaging surrender after the end of its useful life to a collection point for re-processing.



WARRANTY

We provide guarantee on material and manufacturing defects hidden under the legal provisions of the given country, at the minimum at least 12 months. In the EU, the warranty period is 24 months for exclusively private use (please see invoice or delivery note for further information). Damage resulting from usual wear and tear, overloading, misuse and improper use and handling, respectively damage caused by the user or use contrary to the instruction manual, or damage that has been known to a buyer before purchasing the product, are excluded from the guarantee. Any complaints can only be accepted if the machine is complete, not dismantled, sent back to the manufacturer or authorised service centres (please see list of service centres). Keep the operating instructions, safety instructions and proof of purchase. Otherwise the manufacturer operates in accordance to its issued warranty conditions in latest update.